

TECNOCRYO HIGH PRESSURE REGULATOR TCR6



TCR6 Standard Series 3/4" to 1"

PRESSURE REGULATORS

Stainless steel

TCR 6 | STANDARD SERIES FROM 3/4" TO 1", 60 BAR

Pressure Regulators made of stainless steel 316 L designed and manufactured for heavy-duty applications. Control system with convoluted diaphragm for the best stability and precision. Balanced poppet-valve (shutter) to keep the outlet pressure almost constant and independent from fluctuation of inlet pressure. Self-relieving execution for exhausting over-pressure, just for compressed air application. Outlet pressure range till to 50 bar (725 psi). Adjusting by screw with hex. head. Connections for outlet pressure gauge on both the sides Special version (i.e. no self-relieving for gases and liquid) on request. **Important:** filter upstream the press. reg. is strictly recommended

APPLICATIONS:

- Pharmaceutical industry;
- Chemical industry;
- Oil & gas and Off Shore applications;
- Food industry;

FEATURES:

- Particular attention to the low level of roughness of surfaces, to grant high standard of cleaning;
- Compatible for use in aggressive environment;
- Suitable for extreme temperatures (-60°C), critical environments, hazardous applications;
- Suitable to be cleaned and sanitized by the most common processes;

MATERIALS

Body, bonnet	316L stainless steel
Seals	HNBR - EPDM - FKM - Silicone
Diaphragm	HNBR - EPDM - FKM - Silicone
Internal parts	316L stainless steel
Shutter	PU - HNBR - EPDM - FKM - Silicone

TECHNICAL DATA

	3/4"	1"
Port thread	3/4" BSPP F - 3/4" NPT F	1" BSPP F - 1" NPT F
P. max Inlet	60 Bar (50 bar Temp > 80°C)	
Range outlet pressure	0.3-3 / 0.5-8 / 0.5-17.2 / 2.5-25 / 5-50 Bar 4.4-44 / 7.2-116 / 7.2-250 / 36-362 / 72.5-725 Psi	
Gauge connections	1/4" BSP F - 1/4" NPT F	
Self-relieving port	1/8" GF	1/8" BSP F
Flow rate *)	290 Nm³/h - 4800 dm³/min	370 Nm³/h - 6166 dm³/min
Kv *)	Kv = 4.23 Nm³/h (EN 60534)	
Weight	1.6kg/3lb	2.3kg/5lb
Working temp.	-25°C to +110°C (HNBR) / -50°C to +130°C (EPDM) / -60°C to +230°C Silicone / -20°C to +200°C FKM (optional)	
Conformity to Directives	CE 94/9/EC ATEX - ASTM A182 Nace MR0.175 - 97/23/EC PED	


*) P_{IN} 10bar, P_{OUT} 6.3bar, ΔP 1bar

TCR6 Standard Series 3/4" to 1"

PRESSURE REGULATORS

Stainless steel


DESIGNED AND CONSTRUCTED FOR HEAVY-DUTY APPLICATIONS

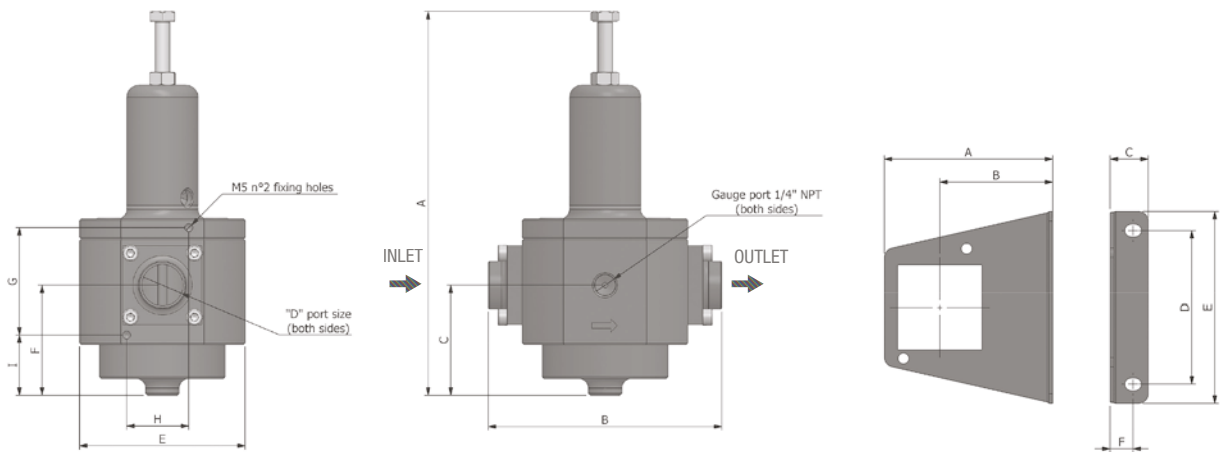

SIZE	A	B	C	D	E	F	G	H	I
3/4" - 1"	204	124	59	3/4"-1	88	59	57	33	32

SIZE	A	B	C	D	E	F
1/4"	88	59	20	80	100	12

FLOW RATE

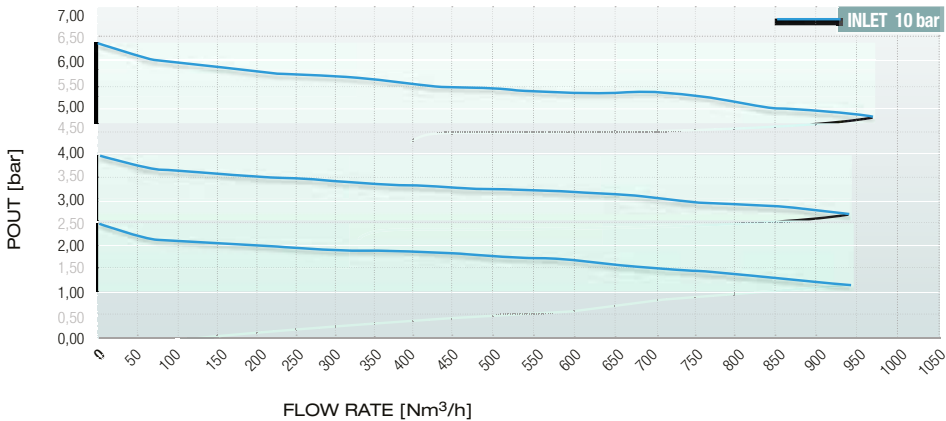

OPTIONALS

• Bracket • Gauge • Flanges (EN1092-1 / ANSI) • Without reliving • Dome loaded execution • Threaded connection for exhausting gas on bonnet

NOTE



Manderlay House
Manderlay Gardens
Emley
West Yorkshire
HD8 9TY

Email: enquiries@part-hunter.co.uk