

TECNOCRYO FILTER REGULATOR TCR60



TCR60 Standard Series 1/4" to 3/4"

FILTER REGULATORS

Stainless steel

OIL & GAS



TCR 6 | STANDARD SERIES FROM 1/4" TO 3/4", 60 BAR

Filter/regulators made of stainless steel 316L, designed and manufactured for heavy-duty applications. Control system with convolved diaphragm for the best stability and precision. Balanced poppet-valve (shutter), to keep the outlet pressure almost constant and independent from fluctuation of inlet pressure. Self-relieving execution for exhausting over-pressure, just for compressed air application. Outlet pressure range till to 50 bar (725 psi), adjustable by screw with hexagonal head. Connections for outlet pressure gauge on both the sides. Special version (without self relieving for gases and water) on request.

APPLICATIONS:

- Pharmaceutical industry;
- Chemical industry;
- Oil & gas and Off Shore applications;
- Food industry;

FEATURES:

- Particular attention to the low level of roughness of surfaces, to grant high standard of cleaning;
- Compatible for use in aggressive environment;
- Suitable for extreme temperatures (-60°C), critical environments, hazardous applications;
- Suitable to be cleaned and sanitized by the most common processes;

MATERIALS

Body, bonnet	316L stainless steel
Bowl	316L stainless steel
Seals	HNBR - EPDM - FKM - Silicone
Diaphragm	HNBR - EPDM - FKM - Silicone
Internal parts	316L stainless steel
Shutter	PU - HNBR - EPDM - FKM - Silicone
Filter element	Stainless steel 316L (5-25-50 µ)

TECHNICAL DATA

	1/4" - 3/8"	3/8" - 1/2" - 3/4" L
Port thread	1/4" - 3/8" BSPP F; 1/4" - 3/8" NPT F	3/8" - 1/2" - 3/4" BSPP F; 3/8" - 1/2" - 3/4" NPT F
P. max Inlet	16 Bar (with automatic drain) 60 Bar - 870 psi (50 bar Temp > 80°C) Optional version TCR7 70 BAR	
Range outlet pressure	0.3-3 / 0.5-8 / 0.5-17.2 / 2.5-25 / 5-50 Bar / 4.4-44 / 7.2-116 / 7.2-250 / 36-362 / 72.5-725 Psi	NEW
Gauge connections	1/4" BSPP F - 1/4" BSPP F	
Drain	Manual - Automatic	
Self-relieving port	1/8" BSPP F	
Flow rate *)	250 Nm ³ /h - 4160 dm ³ /min	310 Nm ³ /h - 5160 dm ³ /min
Kv	Kv = 1.69 Nm ³ /h (EN 60534)	Kv = 2.12 Nm ³ /h (EN 60534)
Weight	1.6kg/3lb	2.3kg/5lb
Working temp.	-25°C to +110°C (HNBR) / -50°C to +130°C (EPDM) -60°C to +230°C (Silicone) / -20°C +200°C FKM (optional)	
Conformity to Directives	CE 94/9/EC ATEX - ASTM A182 Nace MR0.175 - 97/23/EC PED	



*) P_{IN} 10bar, P_{OUT} 6.3bar, ΔP 1bar

TCR60 Standard Series 1/4" to 3/4"

FILTER REGULATORS

Stainless steel


DESIGNED AND CONSTRUCTED FOR HEAVY-DUTY APPLICATIONS

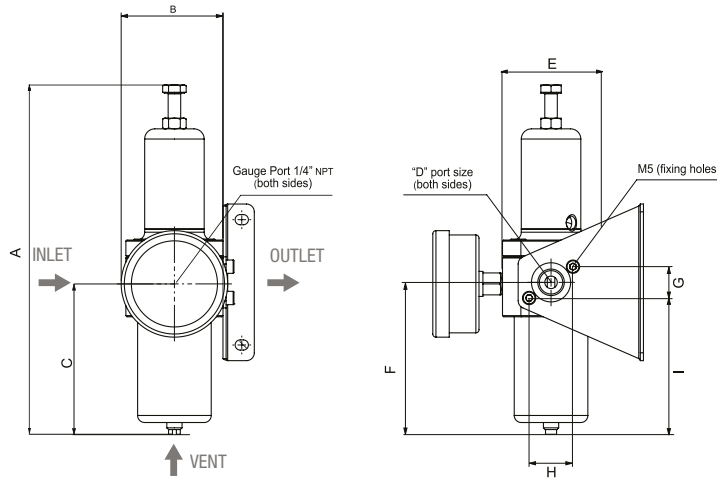


SIZE	A	B	C	D	E	F	G	H	I
1/4"-3/8"	234	60	112	1/4"	60	112	22	28	102
1/2"-3/4"	237	68	114	1/2"-3/4"	68	114	22	32	103
3/4"L	250	68	118	1/2"-3/4"	68	118	22	32	103

SIZE	A	B	C	D	E	F
1/4"	80	59	20	80	100	12
1/2"-3/4"	80	59	20	80	100	12

FLOW RATE Series TCR60 Regulator 1/4"

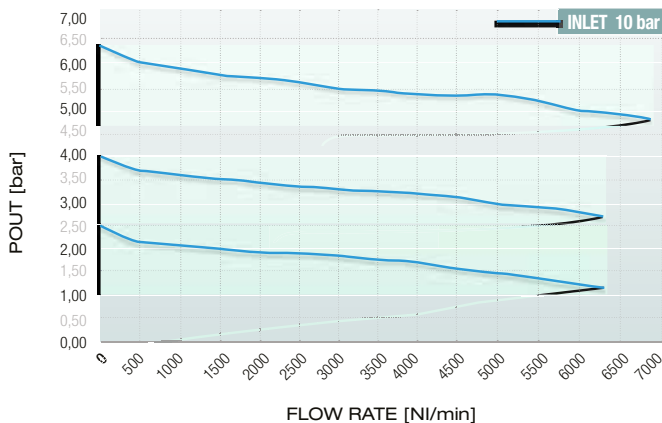

FLOW RATE Series TCR60 Regulator 1/2"

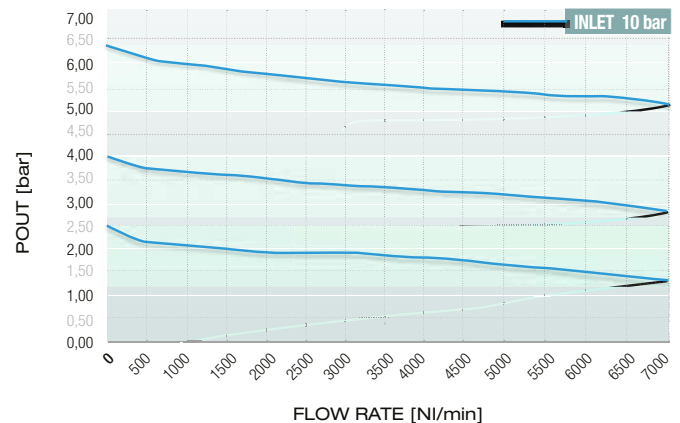

OPTIONALS

- Inlet pressure : max 70 bar • Inlet pressure: max. 100 bar • Bracket • Gauge • Flanges (EN1092-1/ANSI) • Without relieving
- Automatic drain (Pin max. 16 bar) • Oring Kalrez® • Connection for exhausting gas on bonnet

NOTE



Manderlay House
Manderlay Gardens
Emley
West Yorkshire
HD8 9TY

Email: enquiries@part-hunter.co.uk