

VOLUME BOOSTER SVB60-AH4N BROCHURE



Volume Booster SVB60-AH4N

VB60 (G 1/2, G 3/4) (ALUMINIUM) - HIGH FLOW

FEATURES

- Type 60 Volume Booster amplifies the volume at a 1:1 ratio whenever input isolation or increased flow capacity is required.
- High capacity Volume Booster, with a fixed minimum deadband, are designed to substantially improve the stroking speed of large actuators.
- An integral adjustable bypass valve provide good operational system stability over wide range of actuator sizes.
- Soft Valve seat design minimizes air consumption.
- CE, ATEX, EAC [(CUTR-10) equivalent to GOST R &K] approved.
- All External parts are NACE MR 0175* approved.
- SIL3 capable as per IEC 61508.

(*National Association of Corrosion Engineers MR-0175 defines requirements for sulphide stress cracking resistant materials used in oilwells and corrosive environments).

PARAMETERS	SPECIFICATIONS
Fluid	Compressed Air
Pipe size	1/2" , 3/4"
Pipe Thread (Supply/output connection)	NPT - Standard BSPT, BSP - Optional
Signal Connection	1/4" NPT - Standard
Signal / Output Ratio	1 : 1
Supply Pressure	150 psig (10 bar) maximum (not to exceed actuator rating)
Signal / Output Pressure	100 psig (7.0 bar) maximum
Flow Capacity Standard Nominal Flow Rate at 150 psi (10 bar) inlet pressure 87 psi (6 bar) set pressure and a drop of 14.5 psi(1 bar) from set	1/2" or 3/4" : 200 scfm (5670 lpm) CV : 3.80
Flow capacity (CV)	Exhaust : 3.80 Output : 3.80
Signal to output ratio	1:1 5% of 100 psi output span
Maximum Operating Temperature	+80 C
Material of Construction Body, Spacer, Top cover Internals wetted parts	Aluminium Alloy SS316L, SS304,M.S., Aluminium, Brass etc.
Elastomers	Low Temp. Nitrile (NBR) -40 C to +80 C
Linearity	1% (FS)
Weight	2 Kgs.
Gauge (dial size)	50 mm nominal - Std.

Note :Pressure gauges will not be ATEX,CE,SIL3 approved. Gauge dial size 50mm - standard.
Exhaust port - M8 tapped.



ATEX Version



Non ATEX Version

Volume Booster SVB60-AH4N



VB60 (G 1/2, G 3/4) (ALUMINIUM) - HIGH FLOW

Option Selector

Sample Model Number → **S V B 6 0 - S H 4 A - N B - X X X - N - X X X**

Position → **0 1 2 3 4 - 5 6 7 8 - 9 10 - 11 12 13 - 14 - 15 16 17**

0		S = Shavo																					
1	2	Product	VB = Volume Booster																				
3	4	Series	60 = Basic Designer																				
5		Basic MOC	A = Aluminium MOC (Body, Spacer, Top cover)																				
6		Flow	H = High Flow																				
7		Size	4 = 1/2" 6 = 3/4"																				
8		Port Threads	<table><tr><th>Type</th><th>Main Port</th><th>Gauge Port</th><th>Signal Port</th></tr><tr><td>A</td><td>NPT</td><td>BSPT</td><td>1/4" NPT</td></tr><tr><td>B</td><td>BSPT</td><td>BSPT</td><td>1/4" BSPT</td></tr><tr><td>G</td><td>BSP</td><td>BSPT</td><td>1/4" NPT</td></tr><tr><td>N</td><td>NPT</td><td>NPT</td><td>1/4" NPT</td></tr></table>	Type	Main Port	Gauge Port	Signal Port	A	NPT	BSPT	1/4" NPT	B	BSPT	BSPT	1/4" BSPT	G	BSP	BSPT	1/4" NPT	N	NPT	NPT	1/4" NPT
Type	Main Port	Gauge Port	Signal Port																				
A	NPT	BSPT	1/4" NPT																				
B	BSPT	BSPT	1/4" BSPT																				
G	BSP	BSPT	1/4" NPT																				
N	NPT	NPT	1/4" NPT																				
9		Elastomer Material	L = Low Temp.Nitrile																				
10		Mounting	N = No Mounting Bracket B = Standard Mounting Bracket																				

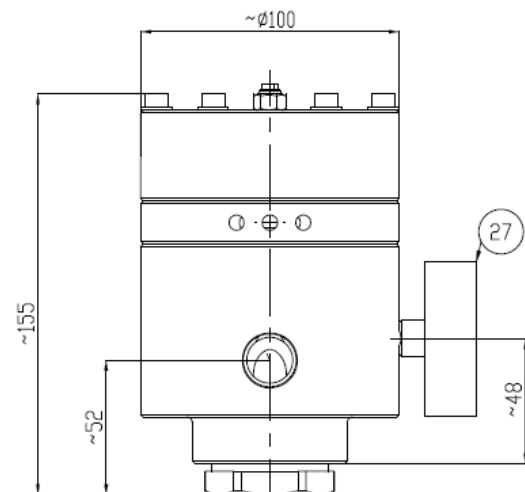

11 12 13 Test / Approval

A	0	0	ATEX
A	0	1	UKEX
A	0	2	UKCA
A	0	3	ATEX, UKEX, EAC Ex, UKCA
A	0	4	ATEX, UKEX, EAC Ex
A	0	5	ATEX, UKEX, UKCA
A	0	6	ATEX, UKEX, EAC Ex
B	0	0	ATEX, CE
B	0	1	ATEX, CE, UKEX, EAC Ex, UKCA
B	0	2	ATEX, CE, UKEX, EAC Ex
B	0	3	ATEX, CE, UKEX, UKCA
B	0	4	ATEX, CE, UKCA, EAC Ex
B	0	5	ATEX, CE, EAC Ex
C	0	0	CE
C	0	1	CE, UKEX, EAC Ex, UKCA
C	0	2	CE, UKEX, EAC Ex
C	0	3	CE, UKEX, UKCA
C	0	4	CE, EAC Ex, UKCA
C	0	5	CE, EAC Ex

Volume Booster SVB60-AH4N

VB60 (G 1/2, G 3/4) (ALUMINIUM) - HIGH FLOW

D	0	0	ATEX, EAC
D	0	1	ATEX, EAC, UKEX, EAC Ex, UKCA
D	0	2	ATEX, EAC, UKEX, EAC Ex
D	0	3	ATEX, EAC, UKEX, UKCA
D	0	4	ATEX, EAC, EAC Ex, UKCA
E	0	0	EAC
E	0	1	EAC, UKEX, EAC Ex, UKCA
E	0	2	EAC, UKEX, EAC Ex
E	0	3	EAC, UKEX, UKCA
E	0	4	EAC, EAC Ex, UKCA
F	0	0	ATEX, SIL3
F	0	1	ATEX, SIL3, UKEX, EAC Ex, UKCA
F	0	2	ATEX, SIL3, UKEX, EAC Ex
F	0	3	ATEX, SIL3, UKEX, UKCA
F	0	4	ATEX, SIL3, EAC Ex, UKCA
F	0	5	ATEX, SIL3, EAC Ex
G	0	0	CE, EAC
G	0	1	CE, EAC, UKEX, EAC Ex, UKCA
G	0	2	CE, EAC, UKEX, EAC Ex
G	0	3	CE, EAC, UKEX, UKCA
G	0	4	CE, EAC, EAC Ex, UKCA
H	0	0	CE, SIL3
H	0	1	CE, SIL3, UKEX, EAC Ex, UKCA
H	0	2	CE, SIL3, UKEX, EAC Ex
H	0	3	CE, SIL3, UKEX, UKCA
H	0	4	CE, SIL3, EAC Ex, UKCA
H	0	5	CE, SIL3, EAC Ex
J	0	0	EAC, SIL3
J	0	1	EAC, SIL3, UKEX, EAC Ex, UKCA
J	0	2	EAC, SIL3, UKEX, EAC Ex
J	0	3	EAC, SIL3, UKEX, UKCA
J	0	4	EAC, SIL3, EAC Ex, UKCA
K	0	0	CE, EAC, SIL3
K	0	1	CE, EAC, SIL3, UKEX, EAC Ex, UKCA
K	0	2	CE, EAC, SIL3, UKEX, UKCA
K	0	3	CE, EAC, SIL3, UKEX, EAC Ex
K	0	4	CE, EAC, SIL3, EAC Ex, UKCA
L	0	0	ATEX, EAC, SIL3
L	0	1	ATEX, EAC, SIL3, UKEX, EAC Ex, UKCA
L	0	2	ATEX, EAC, SIL3, UKEX, EAC Ex
L	0	3	ATEX, EAC, SIL3, UKEX, UKCA
L	0	4	ATEX, EAC, SIL3, EAC Ex, UKCA
M	0	0	ATEX, CE, SIL3
M	0	1	ATEX, CE, SIL3, UKEX, EAC Ex, UKCA
M	0	2	ATEX, CE, SIL3, UKEX, EAC Ex
M	0	3	ATEX, CE, SIL3, UKEX, UKCA
M	0	4	ATEX, CE, SIL3, EAC Ex, UKCA
N	0	0	ATEX, CE, EAC
N	0	1	ATEX, CE, EAC, UKEX, EAC Ex, UKCA
N	0	2	ATEX, CE, EAC, UKEX, EAC Ex
N	0	3	ATEX, CE, EAC, UKEX, UKCA

Volume Booster SVB60-AH4N

VB60 (G 1/2, G 3/4) (ALUMINIUM) - HIGH FLOW

N	0	4	ATEX, CE, EAC, EAC Ex, UKCA
[O]	[0]	[0]	Other customer special requirement if Any
P	0	0	ATEX, CE, EAC, SIL3
P	0	1	ATEX, CE, EAC, SIL3, UKEX, EAC Ex, UKCA
P	0	2	ATEX, CE, EAC, SIL3, UKEX, EAC Ex
P	0	3	ATEX, CE, EAC, SIL3, UKEX, UKCA
P	0	4	ATEX, CE, EAC, SIL3, EAC Ex, UKCA
Q	0	0	ATEX, EAC Ex
R	0	0	EAC Ex
R	0	1	EAC Ex, UKEX, UKCA
R	0	2	EAC Ex, UKCA
S	0	0	SIL3
S	0	1	SIL3, UKEX, EAC Ex, UKCA
S	0	2	SIL3, UKEX, EAC Ex
S	0	3	SIL3, UKEX, UKCA
S	0	4	SIL3, EAC Ex, UKCA
V	0	0	ATEX, CE, SIL3, EAC Ex
V	0	1	ATEX, CE, SIL3, EAC Ex, UKEX, UKCA
V	0	2	ATEX, CE, SIL3, EAC Ex, UKEX
V	0	3	ATEX, CE, SIL3, EAC Ex, UKCA
X	X	X	STANDARD UNITS WITHOUT ANY CERTIFICATE / APPROVAL
Y	0	0	ATEX, SIL3, EACEx
y	0	1	ATEX, SIL3, EACEx, UKEX, UKCA
Y	0	2	ATEX, SIL3, EAC Ex, UKEX
Y	0	3	ATEX, SIL3, EACEx, UKCA
Z	0	1	CE, SIL3, EAC Ex, UKEX, UKCA
Z	0	2	CE, SIL3, EAC Ex, UKEX
Z	0	3	CE, SIL3, EAC Ex, UKCA

14 Pressure Gauge

N = No Gauge
G = With Pressure Gauge (SS316)
(0-16 kg/cm². without ATEX approved.)

15 16 17 Compliance

X	X	X	Standard Unit Without any Compliance
A	0	1	RoHS 3 Compliance
A	0	2	REACH Compliance
A	0	3	Copper Free (Only Applicable Aluminium Version)
A	0	4	RoHS3, REACH Compliance
A	0	5	RoHS3, REACH, Copper Free (Only Applicable for Aluminium Version)
A	0	6	RoHS3, Copper Free (Only Applicable for Aluminium Version)
A	0	7	REACH, Copper Free (Only Applicable for Aluminium Version)



Manderlay House
Manderlay Gardens
Emley
West Yorkshire
HD8 9TY

Email: enquiries@part-hunter.co.uk