

AIR FILTER SF67 1", 1.5" & 2" BROCHURE



Air Filter SF67 1", 1.5" & 2"

SF67 (G 1, G 1½, G 2)

FEATURES

- Filter Model SF67 is designed as a high-performance product for use in corrosive atmospheres.
- Applications include marine environments, oil and gas production, chemicals and food processing, medical analysis etc.
- SIL 3 capable as per IEC 61508.
- CE, ATEX, EAC [CU TR10 (equivalent to GOST R&K)] approved.
- External Metallic parts meet NACE standard MR-01 75*

(*National Association of Corrosion Engineers MR-0175 defines requirements for sulphide stress cracking resistant materials used in oilwells and corrosive environments).



PARAMETERS	SPECIFICATIONS
Fluid	Compressed Air
Pipe size	1", 1 1/2", 2"
Pipe Thread (Supply/output connection)	NPT - Standard BSPT, BSP - Optional
Max. Inlet Pressure	30 bar (435 psi)
Max. Operating Temperature (Ambient)	+80 C
Filter Element size	25 Micron - Std. (5,40 Micron - Optional)
Filter Element material	SS 316 - Std.
Material of Construction Body, Bowl Internal parts External parts	Stainless Steel as per AISI 316L SS 316L with NACE Compliance (MR 0175) SS 316L / SS 304 SS 316L with NACE Compliance (MR 0175)
Elastomers	Low Temp.Nitrile (LNBR) -60 C to +80 C EPDM -35 C to +120 C (Std) Fluorocarbon (Viton-FKM) -20 C to +180 C
Standard Nominal Flow Rate at 6 bar (87 psi) supply pressure and 1 bar (14.5 psi) pressure drop.	1" - 500 scfm (236 dm3/sec) 1 1/2" - 525 scfm (248 dm3/sec) 2" - 550 scfm (260 dm3/sec)
CV Value	1" - (9.40) 1 1/2" - (9.90) 2" - (10.40)
Bowl Capacity Drain	425 ml Manual - Std
Weight	6.5 Kgs.

+ Value indicated are with 40 micron elements with finer element these values will be lower.

SIZE	FLOW	ELEMENT	DRAIN	MODEL
1" NPT	236 dm3/sec. (500 scfm)	25 micron	Manual	SF67-801-M8SA-P
1 1/2" NPT	248 dm3/sec. (525 scfm)	25 micron	Manual	SF67-B01-M8SA-P
2" NPT	260 dm3/sec. (550 scfm)	25 micron	Manual	SF67-C01-M8SA-P

Air Filter SF67 1", 1.5" & 2"

SF67 (G 1, G 1½, G 2)

Option Selector

Sample Model Number —————> **S F 6 7 - 8 0 0 - M 5 S A - X X X - X X X**

Position —————> **0 1 2 3 - 4 5 6 - 7 8 9 10 - 11 12 13 - 14 15 16**

0

S = Shavo

1

Product

F = Filter

2

3

Series

67 = ALL SS 316L UNIT

4

Port Size

8 = 1"

B = 1½"

C = 2"

5

6

Options

04 = Low Temp.Nitrile elastomers

[01] = EPDM elastomers

[02] = VITON elastomers

7

Drain

M = Manual

8

Filter Element

7 = 05 micron SS 316

8 = 25 micron SS 316

9 = 40 micron SS316

9

Bowl

S = STAINLESS STEEL



10

Port Thread

A = NPT

B = BSPT

G = BSP

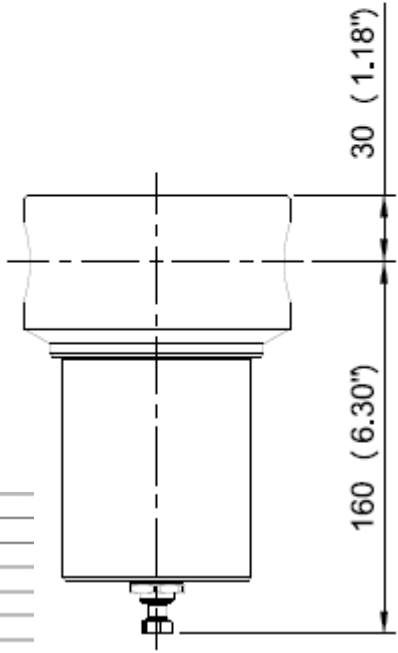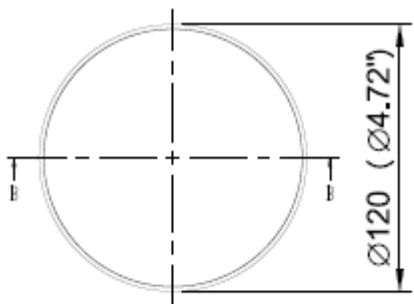

11 12 13 Test / Approval

A	0	0	ATEX
A	0	1	UKEX
A	0	2	UKCA
A	0	3	ATEX, UKEX, EAC Ex, UKCA
A	0	4	ATEX, UKEX, EAC Ex
A	0	5	ATEX, UKEX, UKCA
A	0	6	ATEX, UKEX, EAC Ex
B	0	0	ATEX, CE
B	0	1	ATEX, CE, UKEX, EAC Ex, UKCA
B	0	2	ATEX, CE, UKEX, EAC Ex
B	0	3	ATEX, CE, UKEX, UKCA
B	0	4	ATEX, CE, UKCA, EAC Ex
B	0	5	ATEX, CE, EAC Ex
C	0	0	CE
C	0	1	CE, UKEX, EAC Ex, UKCA
C	0	2	CE, UKEX, EAC Ex
C	0	3	CE, UKEX, UKCA
C	0	4	CE, EAC Ex, UKCA
C	0	5	CE, EAC Ex

Air Filter SF67 1", 1.5" & 2"

SF67 (G 1, G 1½, G 2)

D	0	0	ATEX, EAC
D	0	1	ATEX, EAC, UKEX, EAC Ex, UKCA
D	0	2	ATEX, EAC, UKEX, EAC Ex
D	0	3	ATEX, EAC, UKEX, UKCA
D	0	4	ATEX, EAC, EAC Ex, UKCA
E	0	0	EAC
E	0	1	EAC, UKEX, EAC Ex, UKCA
E	0	2	EAC, UKEX, EAC Ex
E	0	3	EAC, UKEX, UKCA
E	0	4	EAC, EAC Ex, UKCA
F	0	0	ATEX, SIL3
F	0	1	ATEX, SIL3, UKEX, EAC Ex, UKCA
F	0	2	ATEX, SIL3, UKEX, EAC Ex
F	0	3	ATEX, SIL3, UKEX, UKCA
F	0	4	ATEX, SIL3, EAC Ex, UKCA
F	0	5	ATEX, SIL3, EAC Ex
G	0	0	CE, EAC
G	0	1	CE, EAC, UKEX, EAC Ex, UKCA
G	0	2	CE, EAC, UKEX, EAC Ex
G	0	3	CE, EAC, UKEX, UKCA
G	0	4	CE, EAC, EAC Ex, UKCA
H	0	0	CE, SIL3
H	0	1	CE, SIL3, UKEX, EAC Ex, UKCA
H	0	2	CE, SIL3, UKEX, EAC Ex
H	0	3	CE, SIL3, UKEX, UKCA
H	0	4	CE, SIL3, EAC Ex, UKCA
H	0	5	CE, SIL3, EAC Ex
J	0	0	EAC, SIL3
J	0	1	EAC, SIL3, UKEX, EAC Ex, UKCA
J	0	2	EAC, SIL3, UKEX, EAC Ex
J	0	3	EAC, SIL3, UKEX, UKCA
J	0	4	EAC, SIL3, EAC Ex, UKCA
K	0	0	CE, EAC, SIL3
K	0	1	CE, EAC, SIL3, UKEX, EAC Ex, UKCA
K	0	2	CE, EAC, SIL3, UKEX, UKCA
K	0	3	CE, EAC, SIL3, UKEX, EAC Ex
K	0	4	CE, EAC, SIL3, EAC Ex, UKCA
L	0	0	ATEX, EAC, SIL3
L	0	1	ATEX, EAC, SIL3, UKEX, EAC Ex, UKCA
L	0	2	ATEX, EAC, SIL3, UKEX, EAC Ex
L	0	3	ATEX, EAC, SIL3, UKEX, UKCA
L	0	4	ATEX, EAC, SIL3, EAC Ex, UKCA
M	0	0	ATEX, CE, SIL3
M	0	1	ATEX, CE, SIL3, UKEX, EAC Ex, UKCA
M	0	2	ATEX, CE, SIL3, UKEX, EAC Ex
M	0	3	ATEX, CE, SIL3, UKEX, UKCA
M	0	4	ATEX, CE, SIL3, EAC Ex, UKCA
N	0	0	ATEX, CE, EAC
N	0	1	ATEX, CE, EAC, UKEX, EAC Ex, UKCA
N	0	2	ATEX, CE, EAC, UKEX, EAC Ex
N	0	3	ATEX, CE, EAC, UKEX, UKCA
N	0	4	ATEX, CE, EAC, EAC Ex, UKCA

Air Filter SF67 1", 1.5" & 2"

SF67 (G 1, G 1½, G 2)

[O]	[O]	[O]	Other customer special requirement if Any
P	0	0	ATEX, CE, EAC, SIL3
P	0	1	ATEX, CE, EAC, SIL3, UKEX, EAC Ex, UKCA
P	0	2	ATEX, CE, EAC, SIL3, UKEX, EAC Ex
P	0	3	ATEX, CE, EAC, SIL3, UKEX, UKCA
P	0	4	ATEX, CE, EAC, SIL3, EAC Ex, UKCA
Q	0	0	ATEX, EAC Ex
R	0	0	EAC Ex
R	0	1	EAC Ex, UKEX, UKCA
R	0	2	EAC Ex, UKCA
S	0	0	SIL3
S	0	1	SIL3, UKEX, EAC Ex, UKCA
S	0	2	SIL3, UKEX, EAC Ex
S	0	3	SIL3, UKEX, UKCA
S	0	4	SIL3, EAC Ex, UKCA
V	0	0	ATEX, CE, SIL3, EAC Ex
V	0	1	ATEX, CE, SIL3, EAC Ex, UKEX, UKCA
V	0	2	ATEX, CE, SIL3, EAC Ex, UKEX
V	0	3	ATEX, CE, SIL3, EAC Ex, UKCA
X	X	X	STANDARD UNITS WITHOUT ANY CERTIFICATE / APPROVAL
Y	0	0	ATEX, SIL3, EACEx
y	0	1	ATEX, SIL3, EACEx, UKEX, UKCA
Y	0	2	ATEX, SIL3, EAC Ex, UKEX
Y	0	3	ATEX, SIL3, EACEx, UKCA
Z	0	1	CE, SIL3, EAC Ex, UKEX, UKCA
Z	0	2	CE, SIL3, EAC Ex, UKEX
Z	0	3	CE, SIL3, EAC Ex, UKCA

X	X	X	Standard Unit Without any Compliance
A	0	1	RoHS 3 Compliance
A	0	2	REACH Compliance
A	0	3	Copper Free (Only Applicable Aluminium Version)
A	0	4	RoHS3, REACH Compliance
A	0	5	RoHS3, REACH, Copper Free (Only Applicable for Aluminium Version)
A	0	6	RoHS3, Copper Free (Only Applicable for Aluminium Version)
A	0	7	REACH, Copper Free (Only Applicable for Aluminium Version)

14 15 16 Compliance

Note: Options shown in [] bracket are special, please contact Sales HQ/ manufacturing.



Manderlay House
Manderlay Gardens
Emley
West Yorkshire
HD8 9TY

Email: enquiries@part-hunter.co.uk